



F7 + F9

- Anticorrosive finish in polyester resin polymerised at 190°C, after degreasing with phosphate-free nanotechnology treatment.



Combination of filters


Model	Speed	Max. admissible current (A)	Installed power	Maximum airflow (m³/h)			No. pre-filters	No. Filters	Filter Dimensions (mm)		Weight	According ErP
	(r/min)			230V	(kW)	Filters (G4+F6)			Filters (F6+F8)	Filters (F7+F9)		
SV/FILTER-125/H	2220	0,65	0,08	300	255	240	1	1	282x194x48	282x194x98	9,1	2018
SV/FILTER-150/H	2200	1,25	0,17	445	385	360	1	1	334x216x48	334x216x98	12,3	2018
SV/FILTER-200/H	1240	0,85	0,12	590	430	375	1	1	389x248x48	389x248x98	15,1	2018
SV/FILTER-250/H	2380	0,95	0,14	660	560	525	1	1	414x267x48	414x267x98	17,8	2018
SV/FILTER-315/H	1330	0,75	0,12	1035	850	790	1	1	513x344x48	513x344x98	26,4	2018
SV/FILTER-350/H	1280	0,95	0,14	1550	1270	1180	1	1	602x385x48	602x385x98	36,3	2018
SV/FILTER-400/H	1330	1.80	0.30	2050	1720	1600	1	1	660x405x48	660x405x98	46,4	2018



Erp. (Energy Related Products)

Information on Directive 2009/125/EC can be downloaded from the SODECA website or the QuickFan selector programme.

Dimensions in mm

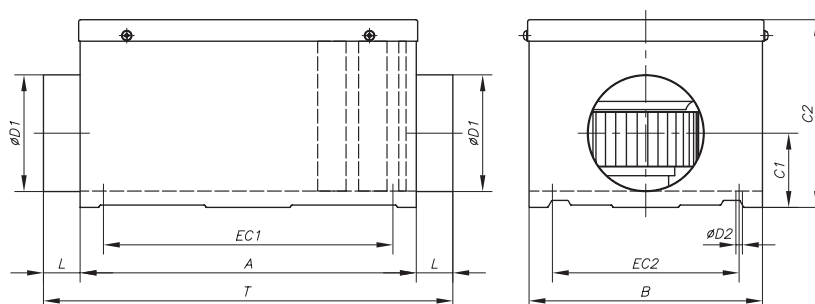

Model	A	B	C1	C2	ØD1	L	ØD2	EC1	EC2	T
SV/FILTER-125/H	657	290	80	222	125	36.5	7	607	240	730
SV/FILTER-150/H	700	340	92	244	150	36.5	7	650	290	773
SV/FILTER-200/H	775	395	117	273	200	36	7	725	345	847
SV/FILTER-250/H	775	395	140	293	250	50	7	725	345	875
SV/FILTER-315/H	860	520	175	371	315	48	8.5	809	469	956
SV/FILTER-350/H	960	610	200	410	355	48	8.5	909	564	1056
SV/FILTER-400/H	1035	670	219	455	400	38	8.5	984	624	1111



Characteristic Curves

Equipment curve according to built-in filters **1** G4+F6 **2** F6+F8 **3** F7+F9

Static pressure

Dynamic pressure

Absorbed power

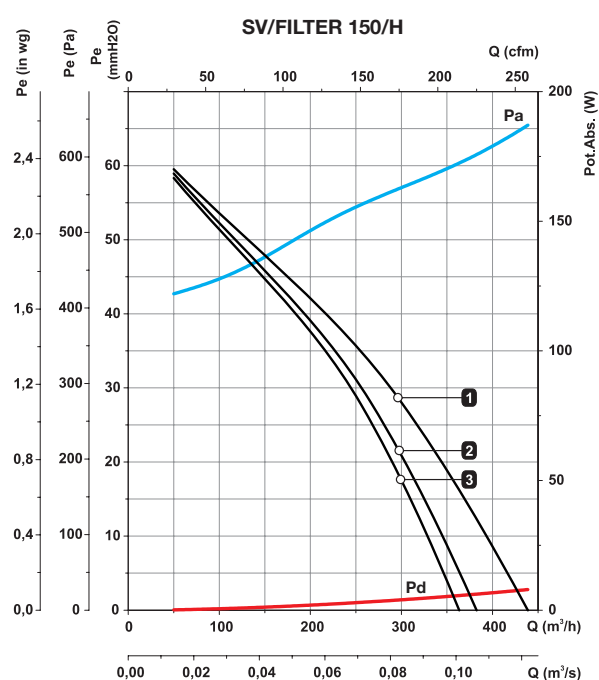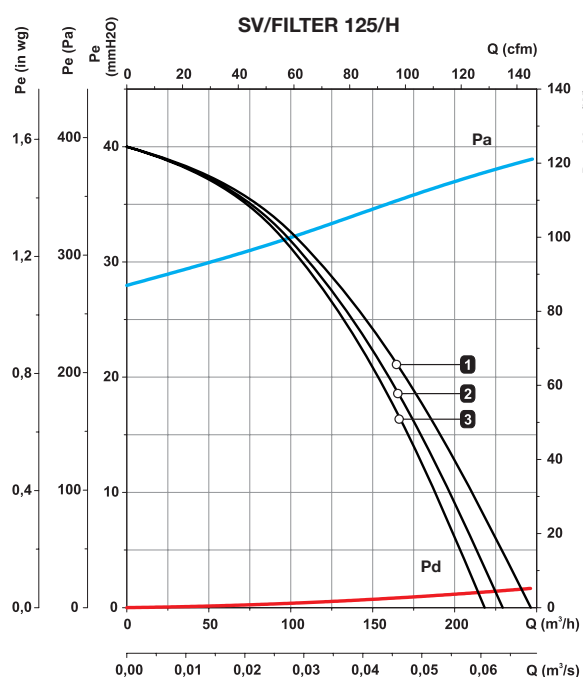





Characteristic Curves

Equipment curve according to built-in filters **1** G4+F6 **2** F6+F8 **3** F7+F9

Static pressure

Dynamic pressure

Absorbed power

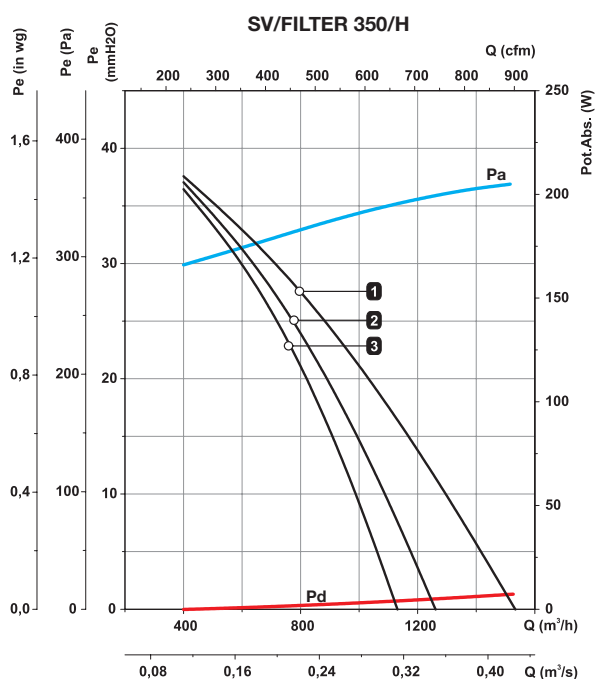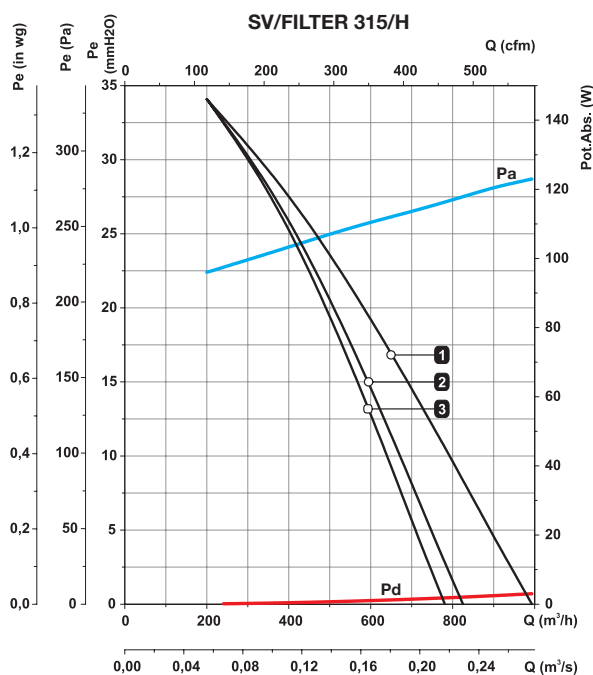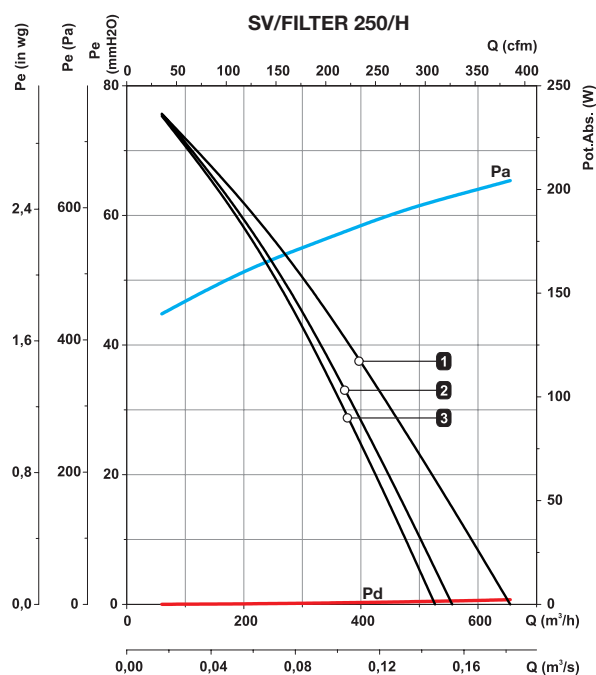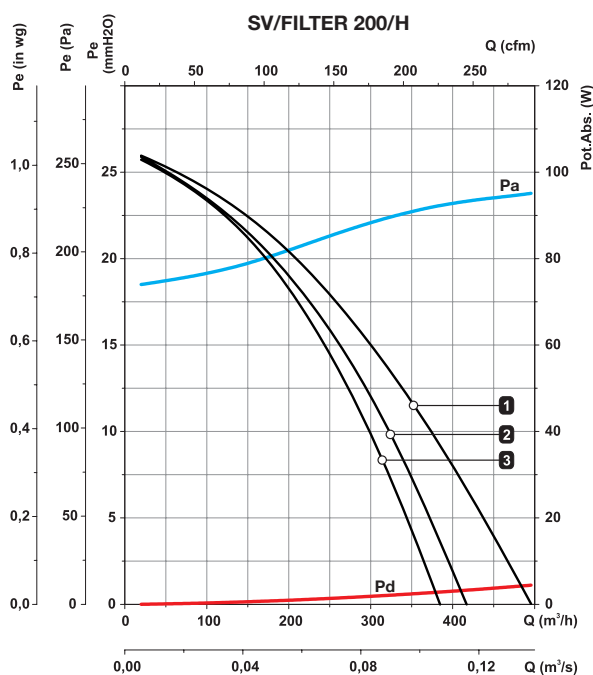


Characteristic Curves

Equipment curve according to built-in filters **1** G4+F6 **2** F6+F8 **3** F7+F9

Static pressure

Dynamic pressure

Absorbed power

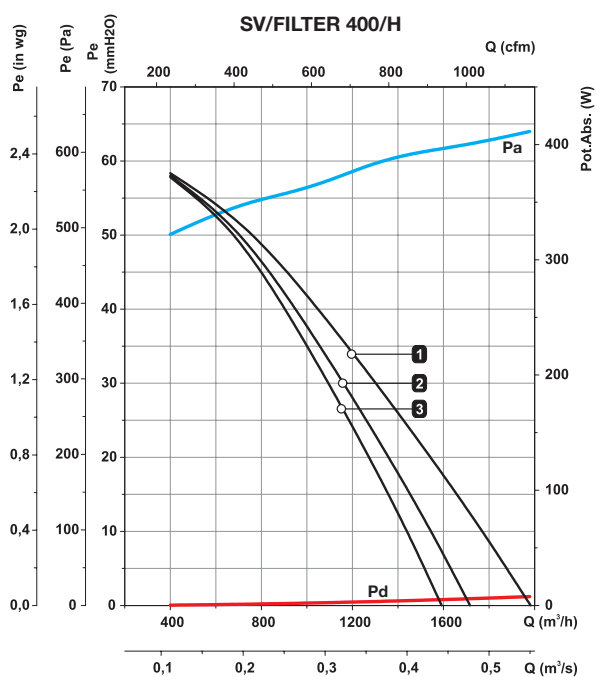

Accessories

See accessories section



FILTERS



CJFILTER



PRESSURE SWITCH



SI-PRESSURE



PRESSURE PROBE



INT



VIS



TEJ